

Your divers will finish faster.

twin self-sealing connections

corrosion resistant
nickel plating

split reaction nut

combined body and bridge

lifting eye bolt




RAPID-TORC SPECIALIZES IN BUILDING
APPLICATION-SPECIFIC TENSIONERS

TRTS Subsea Series. Diver-friendly technology.



Pressures up to 21,750 psi/1500 bar
 Any number of tools can be connected together for simultaneous operation
 Single or twin hydraulic connections available
 Custom thread forms available upon request

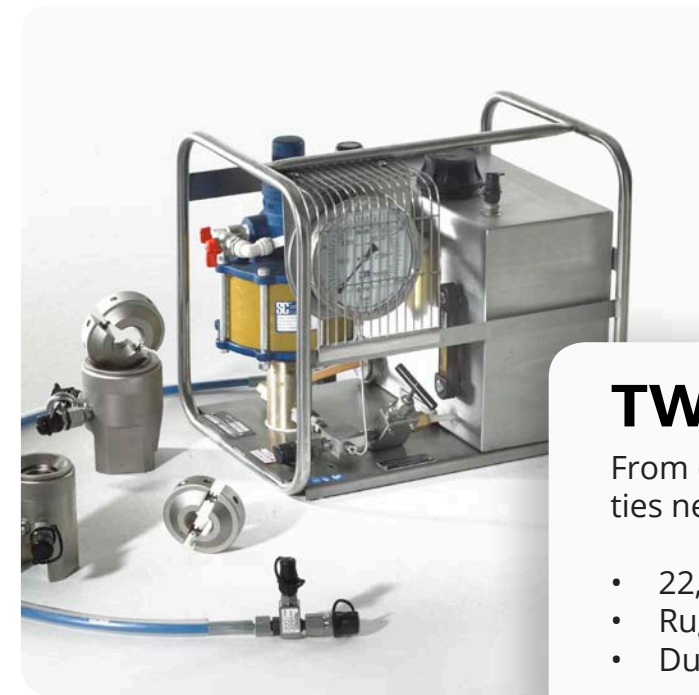

TWIN-C air-driven pumps

From concept to production, this pump embodies the qualities needed to complement Rapid-Torc Tensioner products..

- 22,000psi/1500 bar to 36,000psi/2500bar
- Rugged tubular steel frame.
- Dual scale, damped, calibrated oil pressure gauge.

Model	Bolt Diameter		Max load			Tool OD		Height	
	inch	metric	kn	tonf	lbf	in	mm	in	mm
TRTS1	7/8"	M24	361	36.2	81088	3.54	90	6.73	171
	1"	M27							
	1-1/8"	M30							
	1-1/4"	M33							
TRTS2	1-3/8"	M36	544	54.6	122,304	4.29	109	7.04	179
	1-1/2"	M39							
	1-5/8"	M42							
TRTS3	1-3/4"	M45	812	81.5	182,560	5.11	130	7.79	198
	1-7/8"	M48							
	2"	M52							
TRTS4	2-1/4"	M56	1550	155.5	348,320	6.77	172	9.25	235
	2-1/2"	M64							
	2-3/4"	M72							
TRTS5	3"	M76	2562	2557	5,727,680	8.46	215	10.66	271
		M80							
	3-1/4"	M85							
	3-1/2"	M90							



Hose reel

Hose reel and downline.

TRTS Subsea series has many accessories and complementary tools available.

SUBSEA TENSIONING SYSTEM **TRTS**



Rapid-Torc is dedicated to having the most comprehensive subsea tensioning solutions available.

Rapid-Torc will customize any system to meet your stringent needs. Support is available worldwide.

US Headquarters

Rapid-Torc, Inc
Phone: (281)448-5900
Fax: (281)260-0779
2406 E Pasadena Fwy
Pasadena, TX 77506
USA

European Headquarters

Rapid-Torc SA
Phone: +32 2 358 1933
Fax: +32 2 358 5066
Ave Louise, 306
B-1050 Brussel
Belgium

www.rapidtorc.com
sales@rapidtorc.com

